

WX 6200



Pramac portable generators range: prompt power assistance to light up, tackle site jobs and property improvement works. A complete range to choose from, for best solution to your remote power needs. When not fixing up around the job site, your Pramac portable generator can be used for emergency power during a power outage.

FEATURES

- OHV engine provides consistent power for multiple applications
- Fuel: Petrol
- Starting Systems: Recoil
- Low-oil level shutdown automatically safeguards engine from damage
- Engine oil for the first startup supplied in a bottle
- Digital multi meter tracks engine runtime for maintenance intervals
- Fuel gauge allows user to track gasoline levels
- Practical quick user's Starting Instruction (decal)
- AVR Automatic Voltage Regulator
- Kit wheels integrated for easy transportation



PERFORMANCE

Frequency	Hz	50
Voltage	V	230
Phase		1
Max Power	Watts	5800
Rated Power	Watts	5300




Engine		
Brand		Pramac
Type		OHV
Exhaust emission level		Stage V
Operating Speed Nominal	rpm	3000
Fuel		Petrol
Starting Systems		Recoil
Oil capacity	l	1.1
Low Oil Shutdown		√



Alternator		
Voltage regulation system		AVR

Dimensional data		
Length	(L) mm	800
Width	(W) mm	698
Height	(H) mm	620
Dry weight	Kg	78
Carton box dimension LxWxH	mm	810x625x607

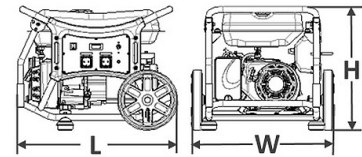

Autonomy		
Fuel tank capacity		26
Fuel consumption @ 50%	l/h	2.17
Running time @ 50%	h	12



Noise level		
Guaranteed noise level (LWA)	dB(A)	97
Noise pressure level @ 7 m	dB(A)	69

GENSET CONTROL PANELS

Mounted on the genset and complete of: instrumentation, control, protection of the generating set and sockets.

COMMANDS

- Selector switch: OFF - ON
- Recoil Start

INSTRUMENTATION

- Voltmeter
- Frequency meter
- Hourmeter
- Fuel gauge

PROTECTIONS

- Thermal protection
- Oil Guard

SOCKET TYPE

SCHUKO 230V 16A IP44		2
2P+T CEE 230V 32A IP44		1



The information is aligned with the Data file at the time of download. Printed on 12/02/2020 (ID 10767)

©2019 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

